

MACHINE-2-MACHINE



DATA SHEET - M2M ENDIANNES

The M2M Endianness is a CANBUS data tracker, a very low power, water resistant, tracking sensor with LTE Cat M1 and NB-IoT connectivity. It can receive and send CAN data and is configurable to the settings of the CAN controller of the machine.



Cell-Locate + GPS &
LTE-Cat-m1 + NB-IoT



Small dimensions



Unique movement
detection algorithm

Facts and numbers

Hardware specs M2M Endianness

MODULE

Name: M2M Endianness

POSITIONING GNSS

GNSS GPS, QZSS
Available Outside on request
Position accuracy < 5 m (CEP50)
Hot start 1.3 s
Cold start 36 s

POSITIONING GEOLOCATE

Method Based on multiple cell towers (when in reach)
Available Inside and outside
Position accuracy < 50m urban area, < 200m countryside
Hot start 1.3 s
Cold start 30 s

CONNECTIVITY

LTE modem LTE Cat M1, NB-IoT
Frequency range 700MHz to 2.2GHz
Max. LTE data rate 375kbs (LTE Cat M1), 60kbs (NB-IoT)
SIM Nano SIM

POWER

Input voltage 6 - 14 Volt. (DC)

CANBUS FUNCTIONALITY

Protocol CAN 2.0 A/B (ISO-11898 standard)
Interval Configurable CAN Sample interval
Speed Up to 1 Mb/s operational
Functions Transmit, receive
Endianness Little, Big

OPERATING ENVIRONMENT

Optimum temp. 20 C°
Deep sleep temp. 0 C°
IP rating IP67
Max. exposure -20 / +65 C°

CERTIFICATION

Regulatory CE, EMC, RoHS

FEATURES

Configuration tracker Update over the air
Configuration CAN With user interface
Identifier Unique Global Returnable Asset Identifier (GRAI) number
Profile Sends heartbeat message periodically
Sends* received CAN data when active
Update** CAN profile remotely
Panic mode Sends multiple messages if panic mode is active
Accurate position Smart combination between cell locate and GNSS

* Interval configurable


** CAN controller needs to be suitable



MACHINE-2-MACHINE

Facts and numbers

Dimensions

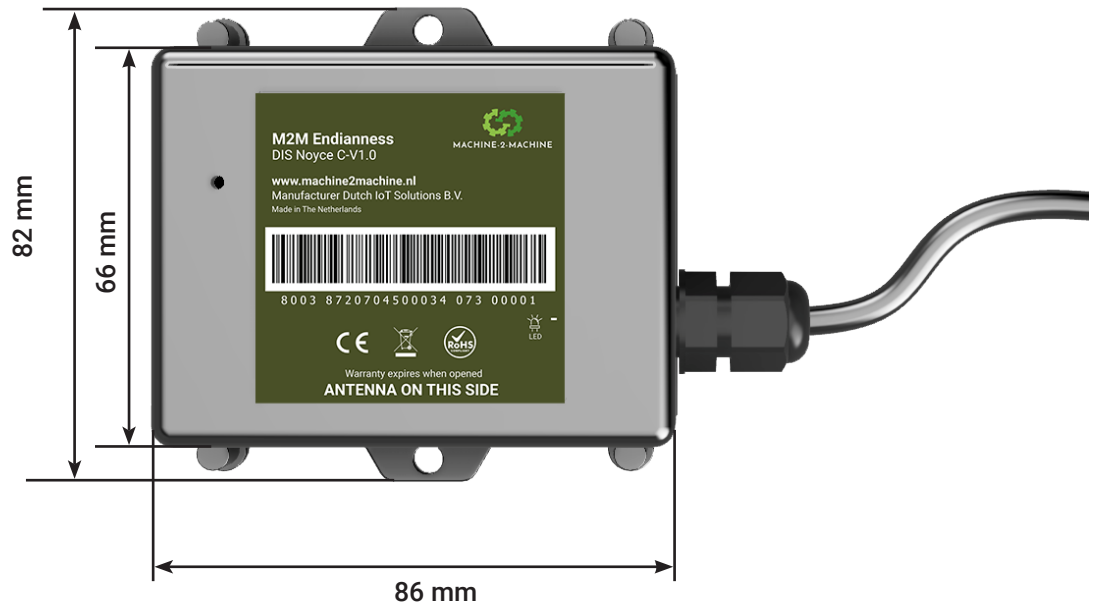

MACHINE-2-MACHINE

Connect Your Machine B.V.– Office KA 0.18
Parallelweg 27
5223 AL 's-Hertogenbosch

+31 85 107 0998

info@machine2machine.com
www.machine2machine.com